



RCT Current Transformer


1. Application

- 1.1 Application: to be used in combination with measurement instruments: ammeters, watt-hour meters, measurement units, control relays, etc.

2. Technical data

- 2.1 Secondary current I_{sn} : 5A
- 2.2 Rated voltage U_e : 660 V
- 2.3 Frequency: 50/60 Hz
- 2.4 Instrument security factor (FS): 10
- 2.5 Operating temperature: $-5^{\circ}\text{C} + 40^{\circ}\text{C}$, humidity $< 80\%$
- 2.6 Standards: IEC 60044-1
- 2.7 Installation type: busbar or plate fixing


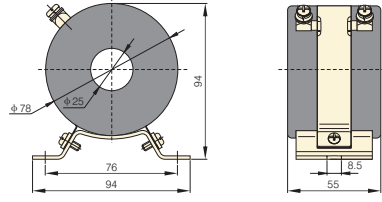


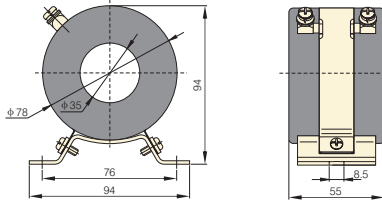


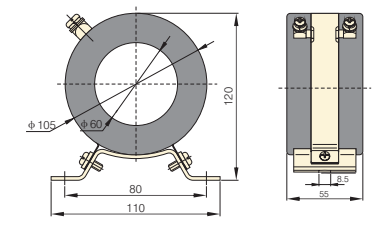


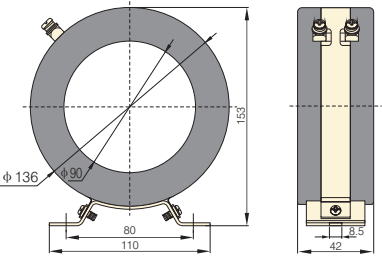


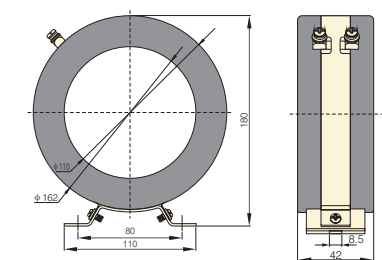


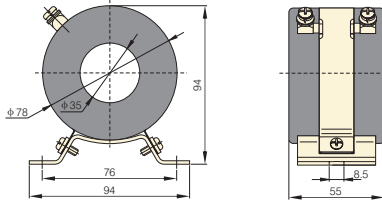


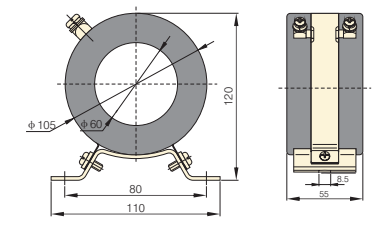


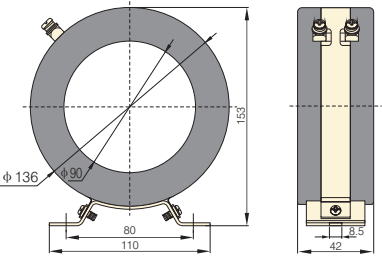


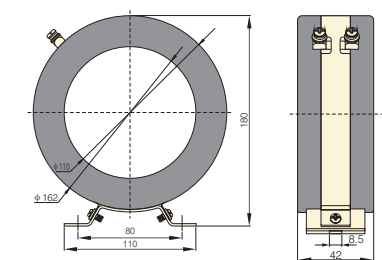


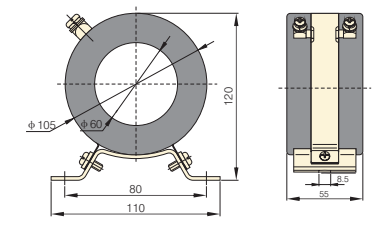


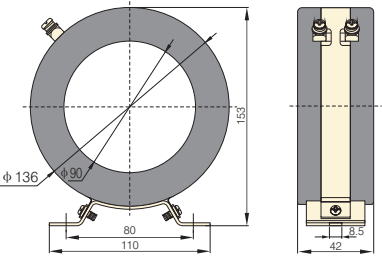


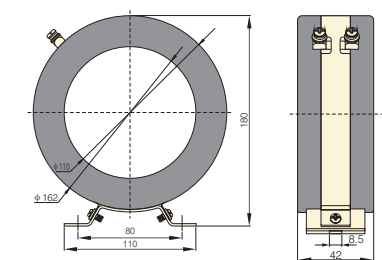


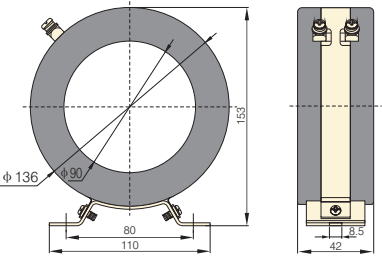


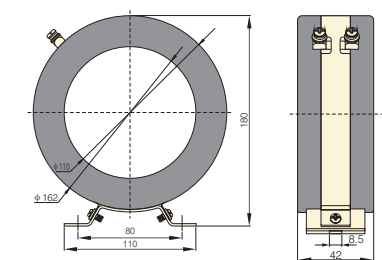


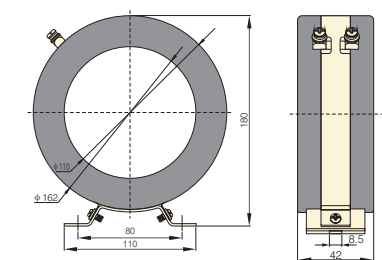

3. Type designation

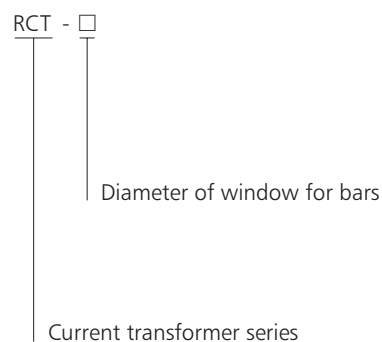

4. Features

- 4.1 The product is characterized by compact design, light weight, etc.
- 4.2 Made of single or several pieces of enameled wire evenly distributed around the core, secondary winding is characterized by good magnetic conductivity capability, low power consumption, small magnetic-flux-leakage and convenient compensation adjustment.
- 4.3 Encapsulated in fire-retardant plastic, the enclosure is characterized by good insulation capacity, high intensity, elegant appearance, light weight, convenient mounting, etc.

5. Technical data

Model	Current ratio (A)	Rated output(VA)		Number of turns through iron core	Overall and installing dimensions (mm)																																																																																																						
		Accuracy class																																																																																																									
		0.5	1																																																																																																								
 RCT-25	75/5	2.5	2.5	1																																																																																																							
	100/5	2.5	2.5	1			 RCT-35	75/5	2.5	2.5	1			100/5	2.5	2.5	1	150/5	5	5	1	200/5	5	5	1	250/5	5	5	1	300/5	5	5	1	 RCT-60	400/5	5	5	1			500/5	10	10	1	600/5	10	10	1	750/5	10	10	1	800/5	10	10	1	1000/5	10	10	1	1200/5	10	10	1	 RCT-90	800/5	10	10	1			1000/5	10	10	1	1200/5	10	10	1	1500/5	10	10	1	1600/5	10	10	1	 RCT-110	1500/5	10	10	1			1600/5	10	10	1	2000/5	20	20	1	2500/5	20	20	1	3000/5
 RCT-35	75/5	2.5	2.5	1																																																																																																							
	100/5	2.5	2.5	1																																																																																																							
	150/5	5	5	1																																																																																																							
	200/5	5	5	1																																																																																																							
	250/5	5	5	1																																																																																																							
	300/5	5	5	1			 RCT-60	400/5	5	5	1			500/5	10	10	1	600/5	10	10	1	750/5	10	10	1	800/5	10	10	1	1000/5	10	10	1		1200/5	10	10	1			 RCT-90	800/5	10	10	1			1000/5	10	10	1	1200/5	10	10	1	1500/5	10	10	1	1600/5	10	10	1	 RCT-110	1500/5	10	10	1			1600/5	10	10	1	2000/5	20	20	1	2500/5	20	20	1	3000/5	20	20	1																					
 RCT-60	400/5	5	5	1																																																																																																							
	500/5	10	10	1																																																																																																							
	600/5	10	10	1																																																																																																							
	750/5	10	10	1																																																																																																							
	800/5	10	10	1																																																																																																							
	1000/5	10	10	1																																																																																																							
	1200/5	10	10	1				 RCT-90	800/5	10	10			1			1000/5	10	10	1	1200/5	10	10	1	1500/5	10	10	1	1600/5	10	10	1	 RCT-110	1500/5	10	10	1			1600/5	10	10	1	2000/5	20	20	1	2500/5	20	20	1	3000/5	20	20	1																																																				
	 RCT-90	800/5	10	10			1																																																																																																				
1000/5		10	10	1																																																																																																							
1200/5		10	10	1																																																																																																							
1500/5		10	10	1																																																																																																							
1600/5		10	10	1	 RCT-110	1500/5	10	10			1			1600/5	10	10	1	2000/5	20	20	1	2500/5	20	20	1	3000/5	20	20	1																																																																														
 RCT-110	1500/5	10	10	1																																																																																																							
	1600/5	10	10	1																																																																																																							
	2000/5	20	20	1																																																																																																							
	2500/5	20	20	1																																																																																																							
	3000/5	20	20	1																																																																																																							